




- 2 x 160 mm dia rolls: these rolls are cored to reduce inertia
- The 2 rolls are sandblasted and hard chrome plated (70 Rck)
- Movement transmission to the upper roll through 2 gears and homokinetic coupling
- Electropneumatic release
- Roll opening stroke control through 2 micrometric manual stops
- Roll force adjustment through a pressure regulator
- Motorisation through a reduction gear free from play and a brushless servomotor with brake
- Measuring of feed length via a motor resolver
- Strip end sensor
- Inlet guide made up of 2 hardened vertical rollers, manually and symmetrically adjustable through a hand wheel
- Inlet basket made up of steel rolls, and 1 counter roll adjustable according to the thickness
- Fixed, welded base

RANGE AND FEATURES

Model	Max. width	Thickness		Max. thickness for max. width	Roll diameter	Support rollers		Max. section	Weight
		Min.	Max.			Quantity	Ø		
	(mm)	(mm)		(mm)	(mm)		(mm)	(mm ²)	(kg)
1160 B	310	0.2	10	10	160	/	/	3100	1600
1160 D	510	0.2	10	8	160	/	/	4080	1950
1160 E	665	0.2	10	7	160	/	/	4655	2100
1160 F	815	0.2	10	5.5	160	/	/	4480	2550
1160 G	1025	0.2	10	4	160	1	45	4080	2775
1160 H	1310	0.2	10	2.75	160	1	45	3600	3000
1160 J	1550	0.2	10	2.25	160	1	45	3490	3200
1160 K	1825	0.2	10	1.75	160	1	45	3200	3500
1160 L	2050	0.2	10	1.5	160	1	45	3075	3700

DIMENSIONS

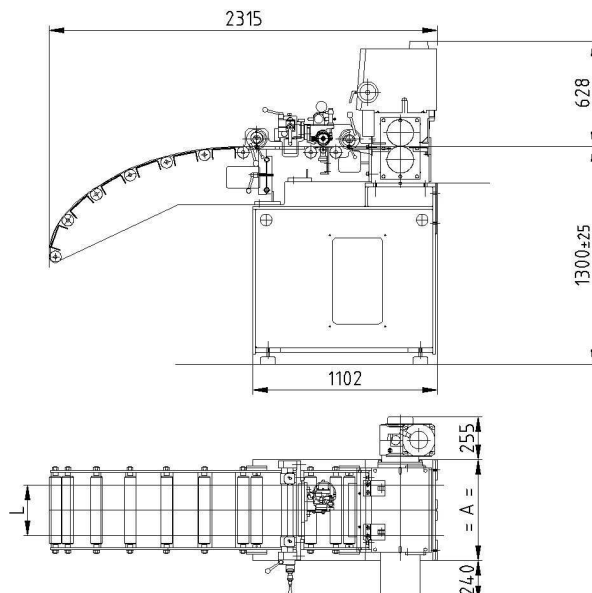

Model	L	A
1160 B	310	600
1160 D	510	800
1160 E	665	950
1160 F	815	1100
1160 G	1025	1300
1160 H	1310	1600
1160 J	1550	1800
1160 K	1825	2100
1160 L	2050	2325